

# G<sup>TM</sup> Governale<sup>®</sup>

## GKS<sup>TM</sup> - Kickspace Heater

### Versatility & Trouble Free

The Governale GKS<sup>TM</sup> kickspace heater is a fully contained, high output heater that can fit where other heaters cannot. It is also the quietest of its type, thanks to custom designed blowers and a unique chassis. Designed for longevity, it requires little maintenance for a problem free life and peace-of-mind.

#### Durable Construction

- Chassis is manufactured from high-grade steel
- Removable, cold-rolled steel grille

#### Reliable Heat Exchanger

- Coil has copper tubes and aluminum fins for efficient performance
- All coils are leak-tested for problem free application

#### Custom Designed Crossflow Blower

- Quiet operation
- Assembly has lubricated steel ball bearings and corrosion-proof design and mounts with high-density foam insulation

#### Efficient Fan Control

- All units are equipped with 2 fan settings
- 120°F reverse acting aquastat—prevents operation until hot water is circulating throughout heat exchanger

#### Convenient Unit Connections

- Supply and return connections are through 1/2" connection points
- 120V/60-Hz/1Ph standard household power supply


## HEATING CAPACITY (1)

ENTERING WATER TEMPERATURE °F (°C)	HEATER RATING								
	1 GPM FLOW			2 GPM FLOW			3 GPM FLOW		
	GKS 45	GKS 90	GKS 110	GKS 45	GKS 90	GKS 110	GKS 45	GKS 90	GKS 110
110 (43)	1555	3540	7800	1595	3610	7850	1640	3690	8030
120 (49)	1890	4260	8165	1930	4350	8275	1970	4440	8470
130 (54)	2285	5010	8585	2330	5120	8700	2375	5230	8905
140 (60)	2720	5820	9000	2770	5955	9120	2825	6085	9340
150 (66)	3205	6615	9410	3275	6760	9545	3350	6915	9775
160 (71)	3685	7350	9830	3770	7515	9970	3855	7675	10,210
170 (77)	4090	8115	10,245	4180	8295	10,390	4270	8475	10,645
180 (82)	4490	8885	10,660	4595	9085	10,815	4695	9280	11,080
190 (88)	4895	9640	11,070	5010	9860	11,240	5120	10,080	11,520
200 (93)	5265	10,405	11,490	5385	10,640	11,660	5520	10,880	11,950
Friction Loss (ft.)	0.15	0.20	0.24	0.76	0.93	1.42	1.10	1.45	2.90

1. Heating capacity in BTU/Hr., 65°F entering air temperature with high fan speed and heating effect considered.

## DIMENSIONS (inches/mm)

MODEL	A	B	C	D
45	10-3/8 (264)	12-7/8 (327)	15 (381)	3-3/4 (95)
90	17-3/8 (441)	12-7/8 (327)	22-1/4 (565)	3-3/4 (95)
110	17-3/8 (441)	12-7/8 (327)	26-1/4 (667)	3-7/8 (98)

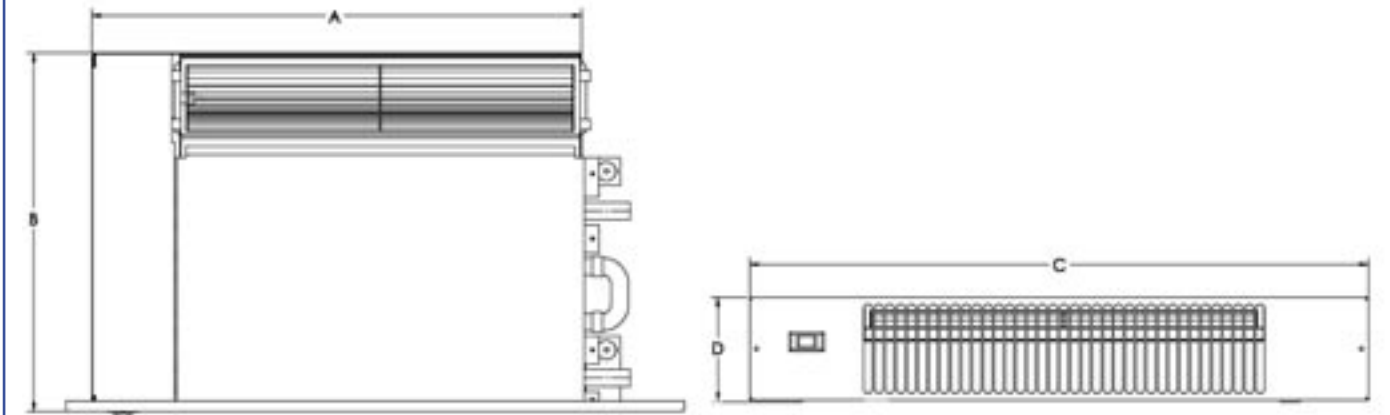

## OPTIONAL ACCESSORIES

### Hose Kit

- The easy connect hose kit allows for simple supply and return connections in new or retro-fit construction applications.

### Floor Mount Kit

- Installed easily between floor joists, the floor mount unit supplies heat to glass walls and doors with completely concealed installation.

### Speed Switch Control

- A variable speed switch is available to be mounted in the wall for precise airflow control.